



Steambaths and Saunas

Steambath Control

Model: DSP

Product Information – DSP

DSP Package Includes Both:

DTC-200 Programmable Timer - Displays set and elapsed time with start/stop button.

DTC-225 Programmable Thermostat - Displays setpoint and ambient temperature with start/stop button.

Dimensions: 4 ¾" x 4 ¾"

Package Includes: (2) Controls, (2) 25-Ft. Multi-Conductor Cables, 3199 series steamhead, Splitter, Strain Relief Clamp, (4) Steel mounting screws for DTC-200 (outside), (4) S/S Mounting screws for DTC-225 (inside), Silicone Sealant, Installation and Operating Instructions.

Required Electrical Service: Low-voltage connection from SM generator via (2) multi-conductor cables (supplied).

Product No. - Finishes:

DSP-10 - Polished Chrome

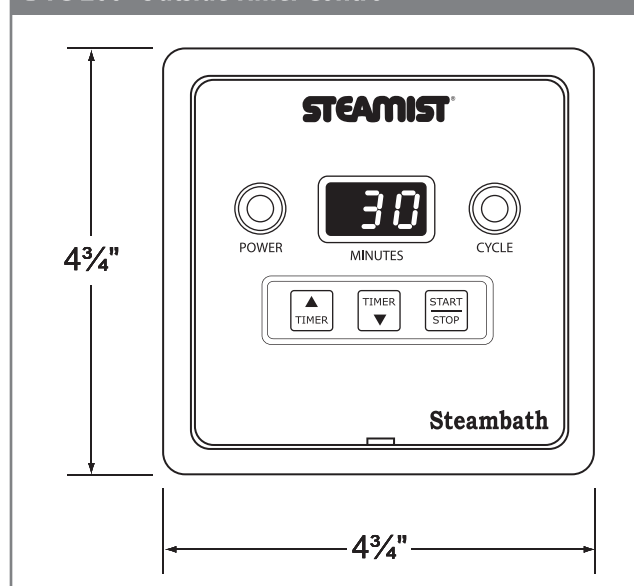
DSP-12 - Polished Nickel

DSP-13 - Brushed Nickel

DSP-16 - Antique Brass

DSP-17 - Polished Brass

DSP-18 - Polished Chrome

DTC-200 Outside Timer Control**Notes****Installation Notes**

Requires (2) single metal gangable switch boxes twinned together for tight fit (per control).

DTC-200 mounts **outside** the steam room only.

DTC-225 mounts **inside** the steam room only and not above steamhead.

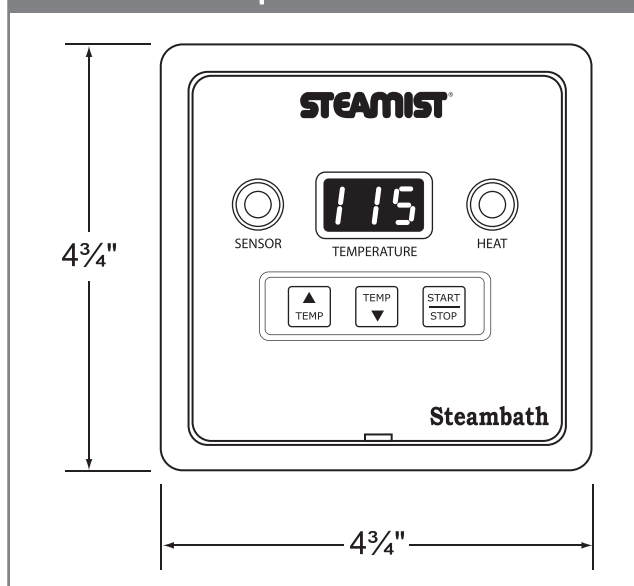
Steamist recommends that the multi-conductor cable be run through ¾" conduit to protect cable from damage and to facilitate easy replacement.

Temperature Control (DTC-225) will not operate without the Timer Control (DTC-200).

Rough-in Notes

DTC-200 and DTC-225 are recommended to be mounted 48" above the floor.

Steamhead is to be mounted 18" above the finished floor or 6" above the rim of the tub and as far from the seating area as possible.

DTC-225 Inside Temperature Control

East Coast Office: 275 Veterans Blvd., Rutherford, NJ 07070 • Tel: 800-577-6478 • Fax: 201-933-0746

West Coast Office: 315 W. Pondera St., Suite F, Lancaster, CA 93534 • Tel: 800-355-6478 • Fax: 661-940-1617