STEAMIST®

Steam Generator — Model SM-79

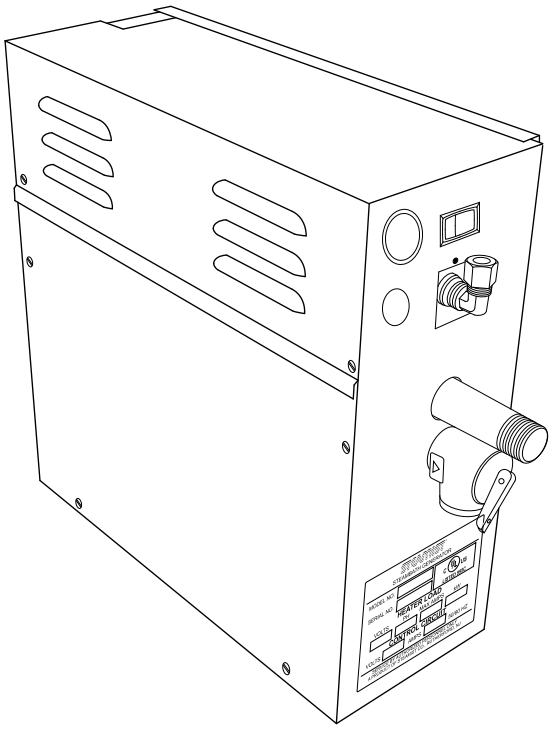

Features:

- *5 years parts warranty - 2 years labor warranty*
- *Generator typically can be installed up to 25 ft from the bathing area*
- *Diagnostic LED Displays*
- *Stainless-Steel Construction*
- *Solid-State Circuitry*

Codes/Standards:

- *UL 499*
- *UL/CUL Listed*
- *City of LA - Approved*
- *City of New York - M.E.A. Approved*

Steam Generator Specification Chart

Model Number	Product Number	KW Rating	Max. Cu. Ft. Range *	Volts/ Phase/ Max. Amps	Wire Size 90°C Copper AWG	Line Fuse	Dimensions L x W x H
SM-79	7900	7.5/9	135-300	240/1/38	8	50	15” x 6” x 15.5”
	7901			208/1/44	6	60	

** Refer to sizing guidelines to accurately determine the proper size generator for the installation.*

Required Equipment:

TC-110, TC-135, DSC-425, or DSP Controls

Required Electrical Service:

Dedicated circuit required: See Specification Chart for proper electrical requirements

Product Information:

Dedicated circuit required: See Specification Chart for proper electrical requirements

- *Water Supply - ⅜” Compression Fitting*
- *Steam Line - ¾” Brass BPT male thread*
- *Pressure Relief Valve - ¾” NPT female thread*
- *Drain Line - None required (Auto-Drain - special order from factory)*

Generator:

Weight - 34 lbs.

Installation Notes:

- *Steam Generators can be typically mounted within 25ft of the bathing area.*
- *Steam Generators should be accessible for service.*
- *Do not install generators outside, in moist, humid area or in an area where parts may freeze or corrode.*
- *Steamhead to be mounted 18” above floor or 6” above rim of tub and as far from the seating area as possible.*

Rough-In Notes:

Access: 21”W x 18”D x 22”H (28”W with Auto-Drain)

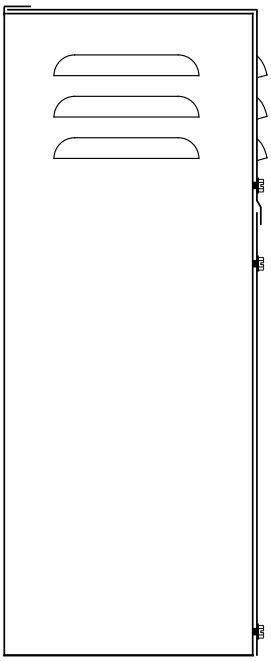

Rear Side View

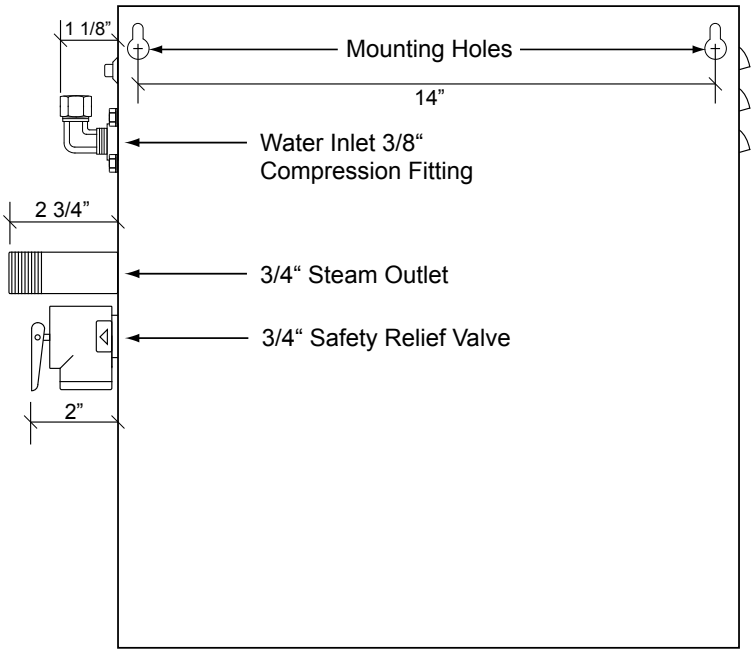

Back View

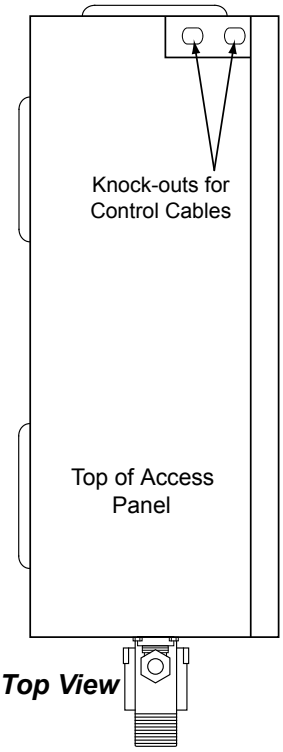

Top View

** Add 1/4” to the dimension for the louvres*

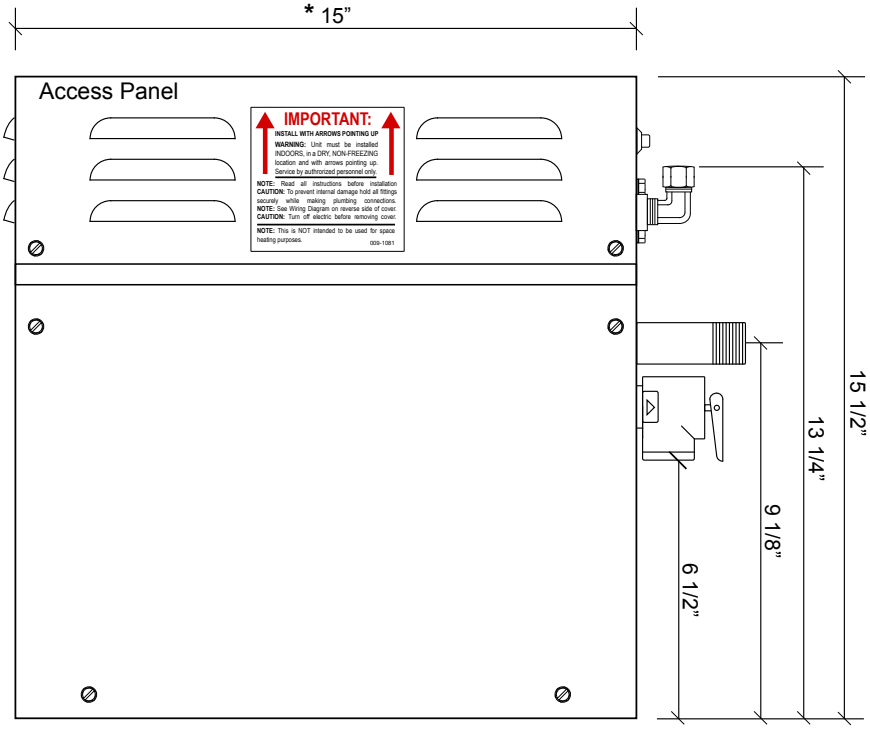

Front Access

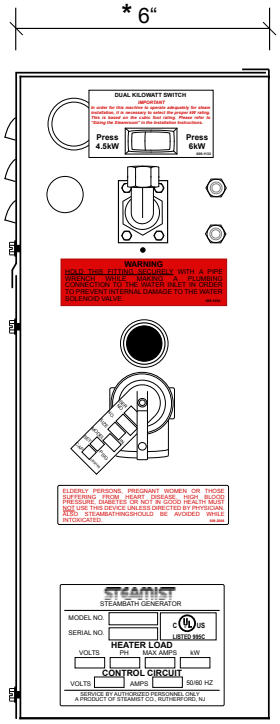

Front Side View

STEAMIST®
East Coast Office: 275 Veterans Blvd., Rutherford, NJ 07070 • Tel: (800) 577-6478 • Fax: (201) 933-0746
West Coast Office: 315 W. Pondera St., Suite F, Lancaster, CA 93534 • Tel: (800) 355-6478 • Fax: (661)940-1617